


AS-C7A

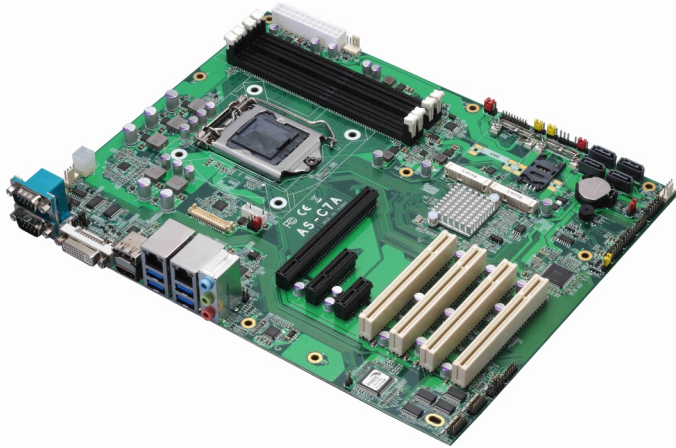

Features

- Intel® 6th & 7th Gen Core™ and Xeon® Processor
- 4 x DDR4 DIMM 1866/2133 MHz up to 64GB
- Integrated VGA, DVI-I, DisplayPort, HDMI, LVDS for Triple display supports
- 1 x Intel® Gigabit PHY LAN, 1 x Intel® Gigabit LAN,
- 4 x SATA3, 4 x USB2.0, 6 x USB3.0, 6 x COM, 1 x LPC,
- 1 x GPIO, 1 x SIM Slot, 1 x PS/2,
- 1 x PCIe X16, 1 x PCIe X4, 1 x PCIe X1, 4 x PCI, 2 x MiniPCle
- Support Watchdog Timer
- Support 4K resolution
- Standard 24-pin ATX power supply and 4-pin 12V

System

Processor	Intel® 6th & 7th Core™ i7/ i5/ i3 and Xeon® E3-1200 v5/ v6 Processor, FCLGA1151 package
Chipset	Intel® C236
Memory	4 x DDR4 DIMM 1866/2133 MHz up to 64GB, Support Non-ECC, unbuffered memory only <i>(Xeon® E3-1200 v5 / v6 Product support ECC memory)</i>
Watchdog Timer	Generates a system reset with internal timer for 1 min/s ~ 255 min/s
Real Time Clock	Chipset integrated RTC with onboard lithium battery
Expansion	2 x MiniPCle (support mSATA), 1 x Sim slot 1 x PCIe X16 slot, 1 x PCIe X4 slot, 1 x PCIe X1 slot 4 x PCI slot

Graphics

Processor	Intel® 9th Gen integrated HD Graphics <i>(Some Xeon® E3-1200 v5/ v6 Product CPU not support)</i>
Display Interface	1 x DVI-I, 1 x DisplayPort <i>(optional)</i> , 1 x LVDS <i>(Note1)</i> 1 x VGA, 1 x HDMI

LAN

Chip	1 x Intel® I219-LM Gigabit PHY LAN 1 x Intel® I210-AT Gigabit LAN
-------------	--

I/O

Serial ATA	4 x SATA3
Audio	Realtek ALC262 HD Audio
Internal I/O	4 x SATA3, 4 x RS232, 4 x USB2.0, 2 x USB3.0, 1 x LVDS, 1 x LCD inverter, 1 x LPC, 1 x GPIO , 1 x Audio, 1 x PS/2, 1 x SMBUS, 1 x VGA
Rear I/O	1 x DisplayPort <i>(optional)</i> , 1 x DVI-I, 1 x HDMI, 4 x USB3.0, 2 x LAN, 1 x RS232/422/485, 1 x RS232, 1 x Audio.

Mechanical & Environmental

Power Requirement	Standard 24-pin ATX power supply and 4-pin 12V
Size	307mm x 244mm (L x W)
Temperature	Operating within 0°C~60°C (32°F~140°F) Storage within -20°C~80°C (-4°F~176°F)
Relative Humidity	10%~90%, non-condensing

Ordering Code

AS-C7A:	Support Skylake & Kabylake i7, i5, i3 S-series and Xeon® E3 v5 v6 Processor , support HDMI, LVDS, VGA, DVI, DP
AS-C7AT:	Support Skylake & Kabylake i7, i5, i3 S-series and Xeon® E3 v5 v6 Processor , support HDMI, LVDS, VGA, DVI, Header for 2nd VGA or 2nd LVDS <i>(Note2)</i>
ADP-3355:	Display port to VGA
ADP-3355NB:	Display port to VGA , without bracket
ADP-3460:	Display port to LVDS

Note1: Onboard 18/24-bit single/dual channel +3.3V/ +5V/ +12V LVDS

Note2: Add ADP-3355 supports 2nd VGA or Add ADP-3460 supports 2nd LVDS.