


LS-57A

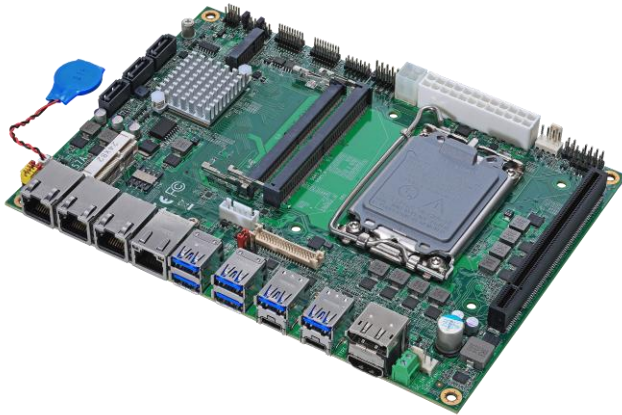

Features

- Support 12th & 13th & 14th Gen Intel® Core™ Desktop Processors
- 2 x DDR5 SO-DIMM 4800 MHz up to 64GB
- Integrated DisplayPort, HDMI, LVDS for four display support
- 1 x Intel® Gigabit LAN PHY, 3 x Intel® 2.5 Gigabit LAN
- 3 x SATA3, 2 x USB2.0, 4 x COM, 1 x SIM Slot, 5 x USB3.2 Gen2
1 x USB3.2 Gen1
- 1 x M.2 2230 Key E for Wi-Fi and Bluetooth
- 2 x M.2 2280 Key M support PCIe Gen4 or SATA
- 1 x MiniPCIe support mSATA
- 1 x PCIe x16 Slot support PCIe Gen5
- Support Watchdog Timer, 4K resolution
- Standard 24-pin ATX power supply and 4-pin 12V or DC input 9~28V

System

Processor Support 12th & 13th & 14th Gen Intel® Core™ Desktop Processors
FCLGA1700 package
(Support up to 65W TDP CPU)

Chipset Intel® Q670E

Memory 2 x DDR5 SO-DIMM 4800 MHz up to 64GB,
Support Non-ECC, unbuffered memory only

Watchdog Timer Generates a system reset with internal timer for
1 min/s ~ 255 min/s

Real Time Clock Chipset integrated RTC with onboard lithium battery

Expansion 1 x M.2 2230 Key E for Wi-Fi and Bluetooth
2 x M.2 2280 Key M support PCIe Gen4 or SATA
1 x MiniPCIe support mSATA
1 x SIM slot
1 x PCIe X16 slot support PCIe Gen5

Graphics

Chipset Intel® UHD Graphics 770 / 730 / 710

Display Interface 1 x LVDS (Note1), 1 x HDMI, 1 x DisplayPort(Note2)

LAN

Chip 1 x Intel® I219-LM Gigabit LAN PHY
(Support iAMT16.0)
3 x Intel® I226-LM Gigabit LAN

I/O

Serial ATA 3 x SATA3

Audio Realtek ALC888S HD Audio

Internal I/O 3 x SATA3, 2 x RS232/422/485, 2 x RS232,
2 x USB2.0, 1 x LVDS, 1 x GPIO,
1 x LCD inverter connector ,
1 x Audio, 1 x SMBus, 1 x SIM slot

Rear I/O

1 x HDMI, 1 x DisplayPort
4 x LAN, 5 x USB3.2 Gen2
1 x USB3.2 Gen1
2 x Type-C (DP Alt. Mode)

Mechanical & Environmental

Power Requirement Standard 24-pin ATX power supply and 4-pin 12V or DC input 9~28V

Size 203mm x 146mm (L x W)

Temperature Operating within 0°C~60°C (32°F~140°F)
Storage within -20°C~80°C (-4°F~176°F)

Relative Humidity 10%~90%, non-condensing

Ordering Code

LS-57A 12th & 13th & 14th Gen Intel® Core™ Desktop Processors , Q670E, support HDMI, DP, LVDS

Note1: Onboard 18/24-bit single/dual channel +3.3V/ +5V/ +12V LVDS

Note2: Add ADP-3355 supports VGA or Add ADP-3460 supports 2nd LVDS, please contact with our sales for OEM version.