

# Industrial Single Board Computer



## Mini-ITX motherboard

### LV-671Z

170mm x 170mm Platform

Intel Celeron® M with DDR266

Onboard VGA, Gigabit LAN, Mini-PCI/Mini-AGP

LVDS, GPIO, Serial port, USB2.0


AC97 5.1-Channel Audio



<b>Form Factor</b>	Mini-ITX compact motherboard
<b>CPU</b>	Onboard Intel Celeron M 600MHz Package: mBGA479 L2 Cache: none Front side bus: 400MHz <b>Optional Enhanced Intel SpeedStep® technology support</b>
<b>Memory</b>	1 x 184-pin DDR200/266 SDRAM up to 1GB
<b>Chipset</b>	Intel 852GM and ICH4
<b>Real Time Clock</b>	Chipset integrated RTC with onboard lithium battery
<b>Watchdog Timer</b>	Generates a system reset with internal timer for 1min ~ 255min
<b>Power Management</b>	ACPI 1.0 compliant, supports power saving mode with ATX PSU
<b>PCI Enhanced IDE</b>	Two UltraATA/100 IDE channels up to 4 ATAPI devices
<b>VGA Interface</b>	Intel 852GM builds in Intel Extreme Graphic 2 technology
<b>Video Memory</b>	Up to 64MB shared with system memory
<b>Audio Interface</b>	Intel ICH4 integrated with Realtek ALC655 5.1 CH AC97 Codec
<b>LAN Interface</b>	1 x Intel 82540EM Gigabit Ethernet Controller
<b>LCD Interface</b>	24-bit dual-channel LVDS interface up to 1400 x 1050 of resolution
<b>Solid State Disk</b>	IDE1 supports DiskOnModule with +5V power supply 1 x Compact Flash Type II socket
<b>GPIO interface</b>	Onboard programmable 16-bit Digital I/O interface
<b>Extended Interface</b>	1 x Mini-PCI or 1 x Mini-AGP ( <b>DVO supported only</b> ) socket 1 x PCMCIA type II card bus slot 1 x slim type PCI slot
<b>Internal I/O Port</b>	1 x audio header for MIC-in/Line-in/Line-out, 1 x CD audio-in, 1 x DC12V/5V output, 1 x slim type floppy port
<b>External I/O Port</b>	1 x RJ45 LAN ports, 1 x DB15 VGA port and 1 x PS/2 Keyboard/Mouse Port, 2 x RS232 Serial Ports, 1 x amplified Speaker out, 1 x S/PDIF, 2 x USB2.0 ports, 1 x parallel port, 1 x DC-in mini-DIN

<b>Power Requirement</b>	DC 12V/19V auto-switching
<b>Input Voltage Range</b>	11V~13V for 12V power supply 16V~19V for 19V power supply
<b>Input Current</b>	12V/60W 19V/60W
<b>Dimension</b>	170mm x 170mm
<b>Temperature</b>	Operating within 0~60 centigrade Storage within -20~85 centigrade


## Cable Kit

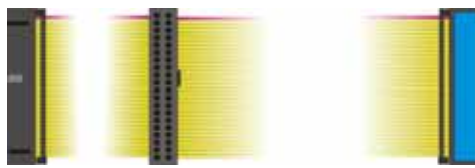

40-pin ATA100 IDE Cable x 1



26-pin Slim Type Floppy Cable x 1

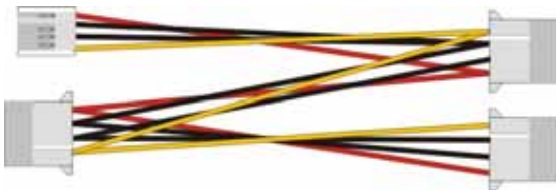

4-pin to 4-pin Power Cable x 1

## Ordering Code

<b>LV-671ZMA</b>	Mini-ITX Embedded Intel Celeron M processor Motherboard with Intel Extreme VGA, LAN, 5.1-CH/SPDIF Audio, Hi-Speed USB 2.0, <b>mini-AGP</b> socket and LVDS interface.
<b>LV-671ZMP</b>	Mini-ITX Embedded Intel Celeron M processor Motherboard with Intel Extreme VGA, LAN, 5.1-CH/SPDIF Audio, Hi-Speed USB 2.0, <b>mini-PCI</b> socket and LVDS interface.
<b>LV-671ZNSMA</b>	Same as <b>LV-671ZMA</b> but without PCMCIA & Compact Flash on the solder side
<b>LV-671ZNSMP</b>	Same as <b>LV-671ZMP</b> but without PCMCIA & Compact Flash on the solder side
<b>SPD-080-12A</b>	80W AC-DC adapter
<b>MA-DVI</b>	Mini-AGP add-on card with DVI interface
<b>MA-SDTV</b>	Mini-AGP add-on card with SDTV interface
<b>MP-323</b>	Mini-PCI add-on card with IEEE1394a interface

**Notice: MA-ATI is not supported for this model**

For further product information please visit the website at <http://www.commell.com.tw>

Taiwan Commate Computer Inc.

8F, NO. 94, Sec. 1, Shin Tai Wu Rd., Hsi Chih, Taipei Shien, Taiwan.

TEL: +886-2-26963909

Website: [www.commell.com.tw](http://www.commell.com.tw)

FAX: +886-2-26963911

E-mail: [info@commell.com.tw](mailto:info@commell.com.tw)

**COMMELL**  
Stage For Your Success